


EPL LED

Panel series

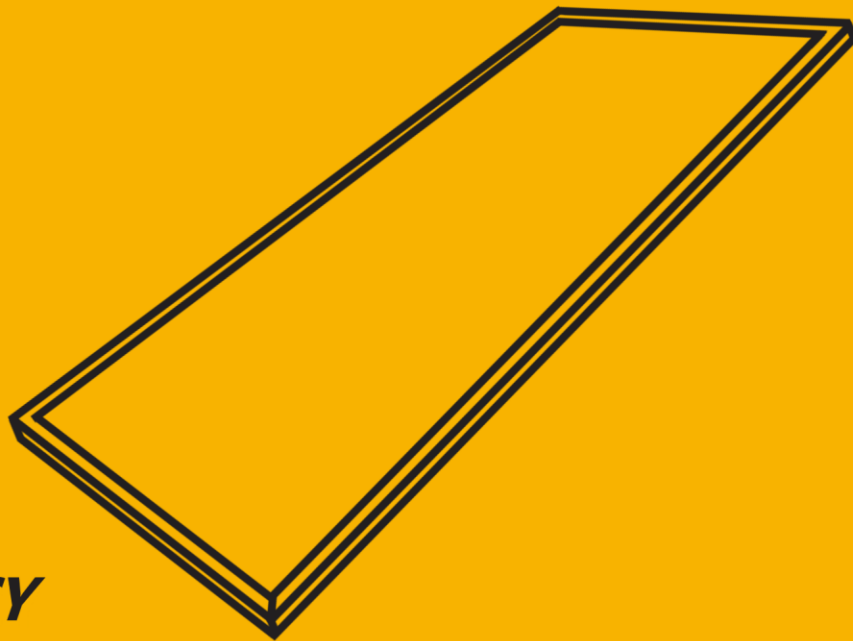

***LUMINOUS EFFICACY
UP TO 130LM/W***

This sleek luminaire has been designed as a straightforward replacement for troffers and recessed applications. Compact and sturdy, this versatile fixture is a great fit for retail and office spaces.

The white aluminum frame allows for excellent heat dissipation while the PMMA diffuser emits a steady, clean light without streaks or dark spots. With recessed or suspended installation options, the EPL LED Panel series is ready to conquer the lighting landscape.

DLC 4.4 STANDARD **CREE** 

OPTICAL SYSTEM

SPECIALIZED PMMA DIFFUSER
FOR A STEADY, SPOTLESS
DISTRIBUTION OF LIGHT

EASY MOUNT SYSTEM



SUSPENSION HOOKS
AVAILABLE FOR SECURING
FIXTURE IN RECESSED
APPLICATIONS OR FOR
EXTENSION IN SUSPENDED
APPLICATIONS



TECHNICAL PARAMETERS

	PL-36W3001200	PL-60W6001200
WATTS	36W (1x4)	60W (2x4)
LUMINOUS EFFICIENCY	130LPW	
CCT	5000K	
CRI	>80	
BEAMANGLE	110°	
VOLTS	100-277VAC, 50/60Hz	
POWER FACTOR	≥.9	
DIMMABLE	0-10V Dimming	
LEDs	CREE CHIPS	
BODY TEMPERATURE	-20~45°C	
AVERAGE RATED LIFE	50,000 Hrs L70	
CERTIFICATIONS	UL/DLC	

PHOTOMETRIC DIAGRAM EFFECTIVE PROJECTED AREA

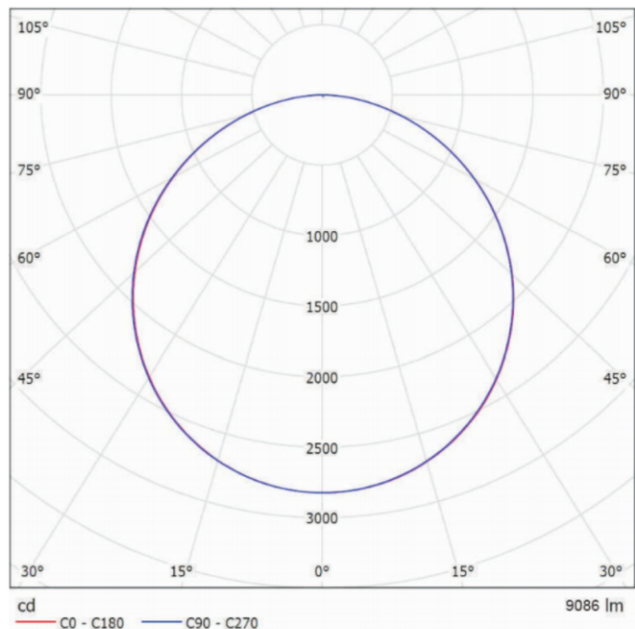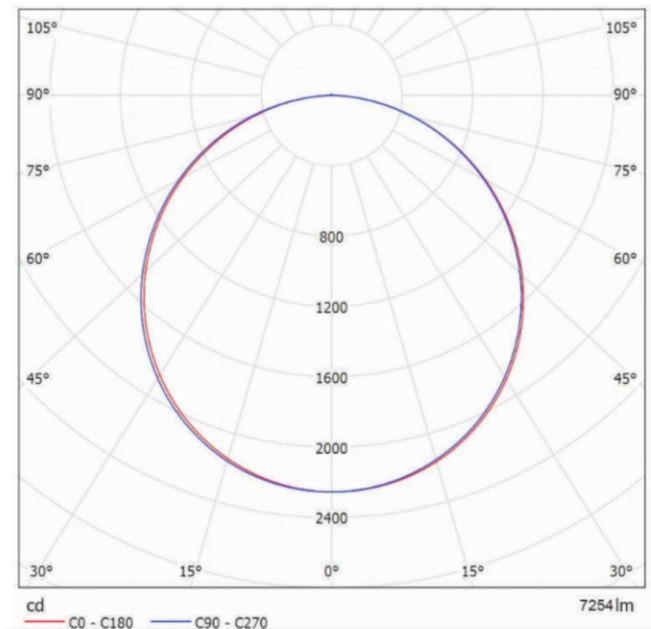

EPL LED

5517 SEDGE WREN DRIVE, WAKE FOREST, NC 27587
201-577-8966 929-390-1505 SALES@EPLLED.COM