

EPL LED

Refrigerated Case series

***LUMINOUS EFFICACY
UP TO 110LM/W***



This versatile luminaire has been designed as a universal fit for nearly all refrigerator, cooler, and case applications. The V-shaped lighting strip dramatically improves the look of food or merchandise being displayed.

With bracketed installation for vertical, horizontal, and ceiling compatibility, alongside high-quality LEDs, the EPL LED Refrigerated Case series is ready to conquer the lighting landscape.

DLC 4.4 STANDARD **CREE** 



OPTICAL SYSTEM

SYSTEM FEATURES A V-SHAPED LED STRIP FOR A WIDE DISTRIBUTION OF LIGHT THAT TARGETS THE PRODUCTS DISPLAYED


EASY MOUNT SYSTEM

BRACKETED INSTALLATION OFFERS FLEXIBILITY IN MULTIPLE APPLICATIONS

TECHNICAL PARAMETERS

	EP-CL15W48CW	EP-CL20W60CW	EP-CL22W72CW
Feet	4ft	5ft	6ft
Wattage	15W	20W	23W
Lumens	1650lm	2200lm	2530lm
CCT	5000K	5000K	5000K
CRI	>80	>80	>80
Life Span	50000-hours	50000-hours	50000-hours
Operating Temperature	-4° to 122°F	-4° to 122°F	-4° to 122°F
Luminaire Efficacy	>110lm/W	>110lm/W	>110lm/W
Input Voltage	100-382VAC	100-382VAC	100-382VAC
PFC	>0.90	>0.90	>0.90
Driver	Internal	Internal	Internal
Dimensions	1.4"x1.2"x44.7"	1.4"x1.2"x57.9"	1.4"x1.2"x67.3"
Weight	0.9 lbs	1.2 lbs	1.3 lbs
Qualified Listed	UL, cUL, DLC	UL, cUL, DLC	UL, cUL, DLC

PHOTOMETRIC DIAGRAM EFFECTIVE PROJECTED AREA

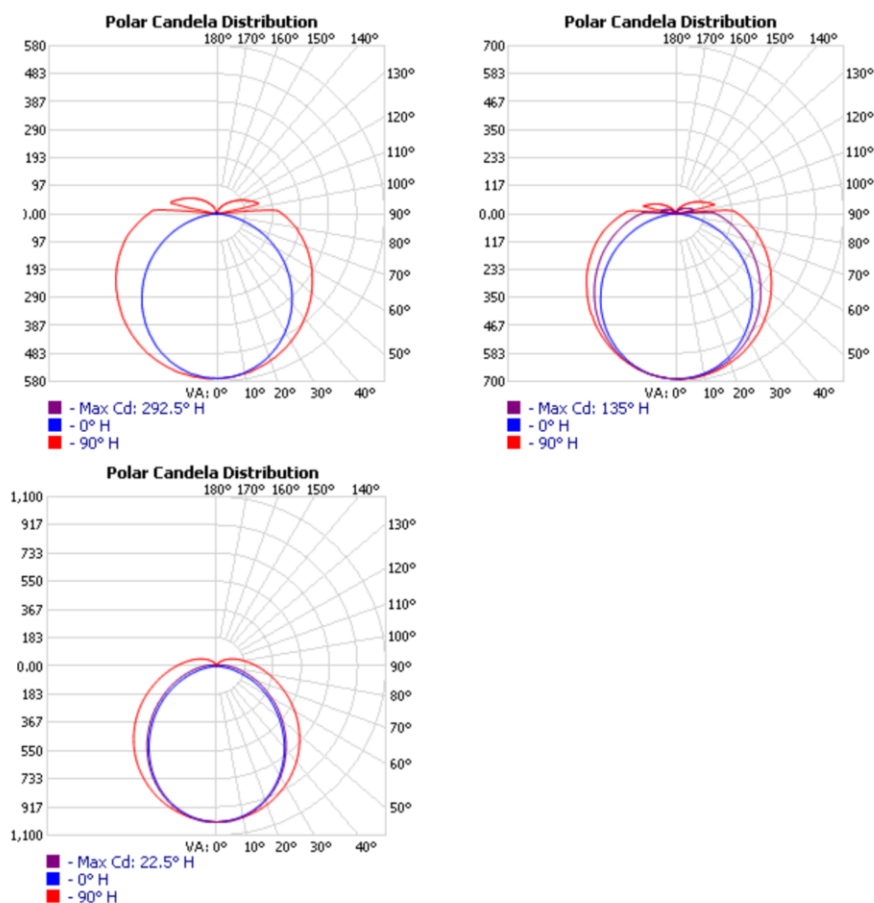

EPL LED

11011 LONGISTICS WAY, STE 200, RALEIGH, NC 27617
201-577-8966 929-390-1505 SALES@EPLLED.COM