


EPL LED

Pole Light series

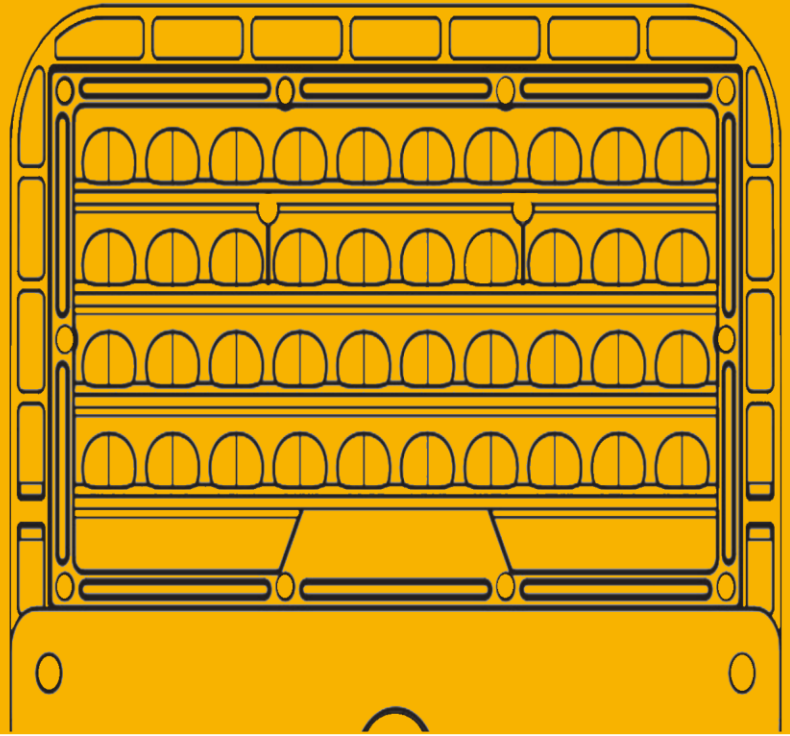

This slick and modern luminaire has been designed to handle any environment. With a beautiful slimline design along with one of the highest lumen performances on the market, this versatile fixture can be used as a flood light or an area light.

With a multitude of mounting options, surge protection devices, IOT photocell capability, and the most technologically advanced LEDs on the market, the EPL LED Pole Light Series is ready to conquer the lighting landscape.



DLC 4.3 PREMIUM

PHILIPS

LUMILEDS

The Brighter Choice

BI LEVEL SENSOR CONTROL

OPTIONAL OCCUPANCY
SENSOR COMPATIBLE

INTEGRATED HEAT SINK

HIGH LEVEL THERMAL
DISSIPATION FOR LONGER
LIFE SPAN


DOOR FRAME

HINGED ACCESS FOR
EASE IN INSTALLATION

TECHNICAL PARAMETERS

Model	HL-PL10WCVXXYYZO	HL-PL15WCVXXYYZO	HL-PL19WCVXXYYZO	HL-PL24WCVXXYYZO	HL-PL30WCVXXYYZO
Lumen Output	14000LM	21000LM	25160LM	28800LM	41400LM
CCT	3000K, 4000K, 5000K, 5700K, 6500K				
CRI	>80Ra				
EPA	0.23ft ²			0.42ft ²	
Light Source	Lumileds				
System Watts	100W	150W	185W	240W	300W
Dimensions(mm)	428x304x88mm			595x304x92mm	
Input Voltage	100-277V / 240-480V				
Power Factor	0.95				
THD	<15%				
Driver	Meanwell, SOSEN Optional				
Operating Temp Range	-40°C to +55°C				
IP Rating	IP66				
Life Span	L70, >120000h				
Light Distributor Options	Type2-M, Type3-S, Type3-M, Type4-S, Type5-M, 90°x120°, 30°, 45°, 60°				
Certification	DLC 4.3, UL, CUL, CE, DLC, SAA				

PHOTOMETRIC DIAGRAMS

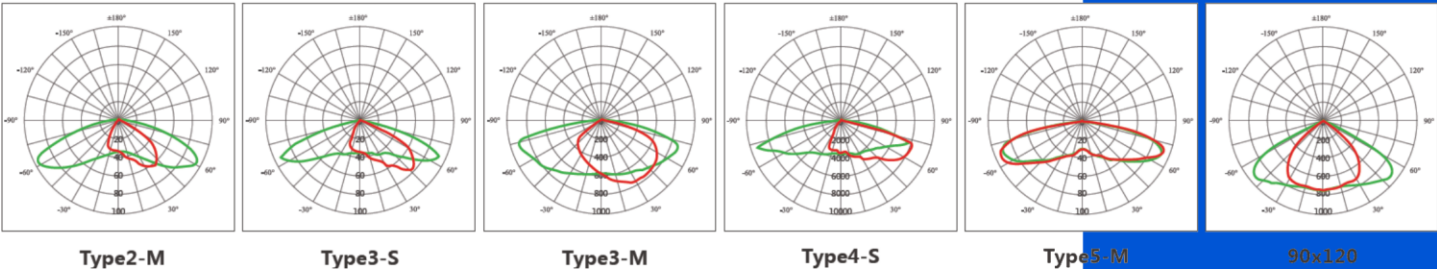

EFFECTIVE PROJECTED AREA

EPA(Sq.Ft.)	Configuration	Weight(Lbs.)
0.55	1	8.50
1.10	2@180	17.00
0.95	2@90	17.00
1.50	3@90	25.50
1.74	3@120	25.50
1.74	4@90	34.00

EPL LED

11011 LONGISTICS WAY, STE 200, RALEIGH, NC 27617
 201-577-8966 929-390-1505 SALES@EPLLED.COM