



LED Ultra Thin CANOPY Light

EPL LED Ultra Thin Canopy Lights



5 YEAR WARRANTY

- Sealed die-casting profile for indoor and outdoor applications
- Low profile design
- Applications include Parking structures, storage areas, shopping area walkways, entryway, and low level security

EPL-CLP-70W-UT



Energy Progress Lighting

1010 Hoyt Avenue | Ridgefield, NJ 07657 | Phone: (201) 313-7194 | Fax: (201) 840-0070
Toll Free: (866) 375-7077 | Email: sales@ep-lighting.com | www.epilled.com

Features & Benefit

- Replacing 100-250W MH
- Lumen output from 4050lm-5900lm
- Three 1/2" threaded conduit and one 3/4" conduit entry points
- Polycarbonate optical lens with heat resisting
- Multiple voltage input is available, support 120-277V and 347-480V input
- UL/cUL listed for wet locations, DLC listed as Parking Garage Luminaires

Specifications

	EPL-CNP-70W-UT
Wattage	70W
Lumens	7700lm
CCT	5000K
CRI	75
Life Span	50000-hours
Luminaire Efficacy	84lm/W
LED Chip	CREE COB LED
Finish Color	Black
Lens	Polycarbonate with Anti UV
Input Voltage	100-277VAC
PFC	>0.90
Dimensions	9.6"x9.6"x3.4" / 4.6 lbs
Qualified Listed	UL, DLC

PRODUCT IMAGE




Energy Progress Lighting

1010 Hoyt Avenue | Ridgefield, NJ 07657 | Phone: (201) 313-7194 | Fax: (201) 840-0070
Toll Free: (866) 375-7077 | Email: sales@ep-lighting.com | www.eplled.com

PRODUCT DEIMENSION


unit: mm/inch

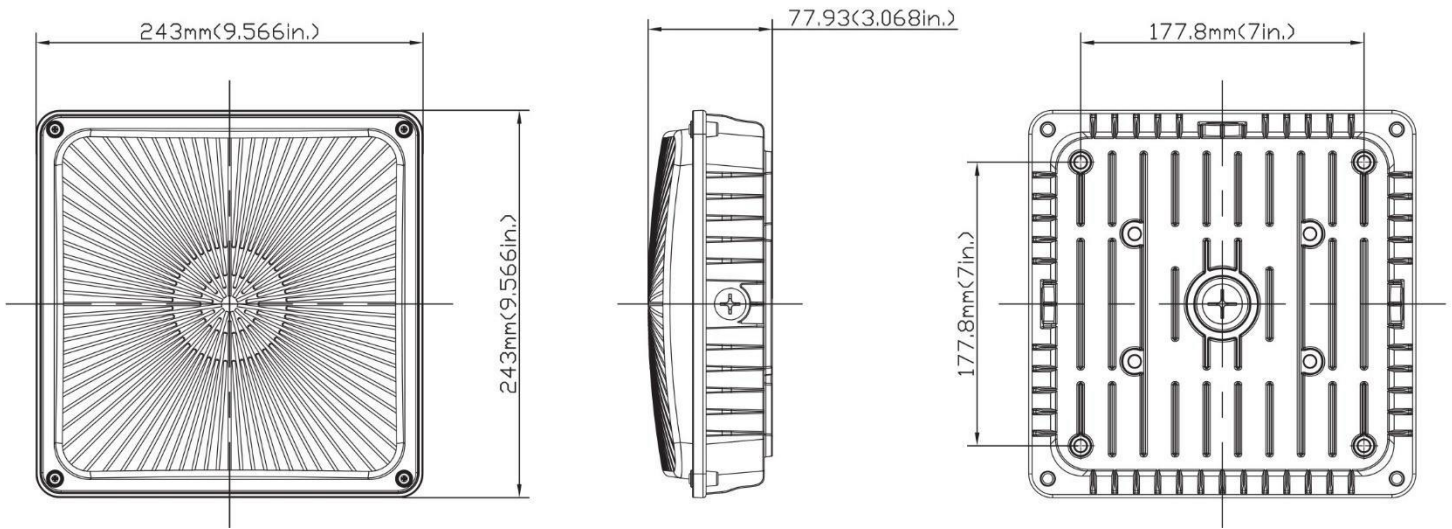


PHOTOMETRICS

CP45W27V40KB

Luminous Intensity Distribution Curve

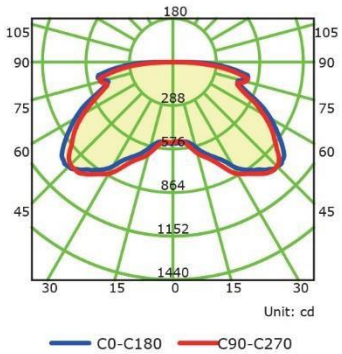


Illuminance at a Distance

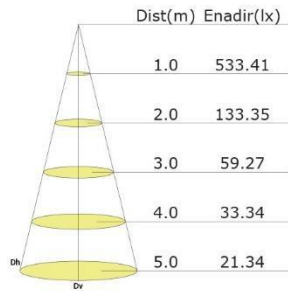


CP70W27V40KB

Luminous Intensity Distribution Curve

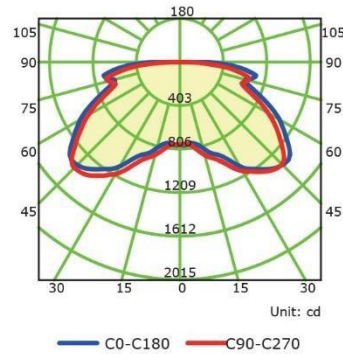

Illuminance at a Distance

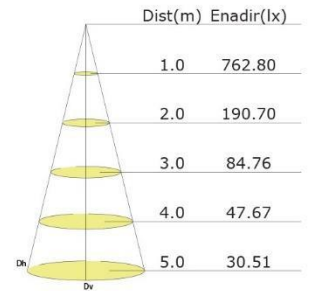

NOTE: Typical mounting height is 2.5-4.5 meters (8ft to 15ft)



Energy Progress Lighting

1010 Hoyt Avenue | Ridgefield, NJ 07657 | Phone: (201) 313-7194 | Fax: (201) 840-0070
Toll Free: (866) 375-7077 | Email: sales@ep-lighting.com | www.eplled.com